

Vinyl Sliding Patio Systems Dimensional Data

Number of Panels	Unit Width	Panel Width	Replacement Height 6'6"				Full Height 6'8"				8'0" Replacement Height			
			Actual Unit Size		Rough Opening		Actual Unit Size		Rough Opening		Actual Unit Size		Rough Opening	
			Width	Height	Width	Height	Width	Height	Width	Height	Width	Height	Width	Height
Single Panel	3/0	3/0	35-1/4"	79-1/2"	36"	80"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Two Panel	5/0	2/6	59-1/4"	79-1/2"	60"	80"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	6/0	3/0	71-1/4"	79-1/2"	72"	80"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	8/0	4/0	95-1/4"	79-1/2"	96"	80"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Three Panel Continuous	9/0	3/0	107-1/4"	79-1/2"	108"	80"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A


Vinyl Sliding Patio Systems Performance Data

Therma-Tru Product	Design Pressure Ratings	AAMA/WDMA 101/ I.S.2	Air Infiltration (scfm/ft2)	Water Reistance (psf)	Structural Load (psf)	Florida Building Code Approval Numbers
Vinyl Sliding Patio doors						
3066 LF/FR	DP 50	69207.01	0.01	7.5	± 50	FL8500
5066 LF/FR	DP 35	67106.01	0.19	5.25	± 35	FL7612
6066 LF/FR	DP 35	67106.02	0.19	5.25	± 35	
5066 LF/FR W/Stiffener	DP 50	67873.01	0.15	7.5	± 50	
6066 LF/FR W/Stiffener	DP 50	67873.02	0.15	7.5	± 50	
8066 LF/FR	DP 35	87112.01	0.14	5.25	± 35	
9066 LF/FR	DP 45	66543.01	0.06	6.75	± 45	


Hinged & Vinyl Sliding Patio Systems

Feature	Classic-Craft®	Fiber-Classic®	Smooth-Star®	Profiles™	Traditions	Vinyl Sliding
Skin Material	Fiberglass	Fiberglass	Fiberglass	Steel	Steel	Vinyl
Skin Texture	Oak, Mahogany, Fir Grains, High Detail Smooth	Mahogany, Oak Grains	Smooth	Smooth	Smooth	Smooth
Exterior Finish Options	Stain or Paint	Stain or Paint	Paint	Paint	Paint	White
Interior Finish Options	Stain or Paint	Stain or Paint	Paint	Paint	Paint	White
Standard Sill	Composite Adjustable	Composite Adjustable or Composite Fixed	Composite Adjustable or Composite Fixed	Composite Adjustable or Composite Fixed	Composite Adjustable or Composite Fixed	Vinyl
Standard Frame	4-9/16" Primed Pine	4-9/16" Primed Pine	4-9/16" Primed Pine	4-9/16" Primed Pine	4-9/16" Primed Pine	Vinyl
Panel Options	Single, Double or Triple	Single, Double or Triple	Single, Double or Triple	Single, Double or Triple	Single, Double or Triple	Single, Double, Triple
Height Options	6'8" & 8'0"	6'6", 6'8" & 8'0"	6'6", 6'8" & 8'0"	6'6", 6'8" & 8'0"	6'6", 6'8" & 8'0"	6'6"
Security Strike Plate	Standard	Standard	Standard	Standard	Standard	N/A
Multi-Point Lock	Optional	Optional	Optional	Optional	Optional	N/A
Standard Glass	Low-E IG	Flush-Glazed Low-E IG	Flush-Glazed Low-E IG	Clear IG	Clear IG	Clear IG
Limited Warranty	Lifetime	Lifetime	Lifetime	10 Years	10 Years IG, 5 Years Door	10 Years
Adjustable Hinges	Optional	Optional	Optional	Optional	Optional	N/A
Panel - Top Rail	Composite	Composite	Composite	Composite	Composite	Vinyl
Panel - Bottom Rail	Composite	Composite	Composite	Composite	Composite	Vinyl

Hinged Patio Systems Handing Options

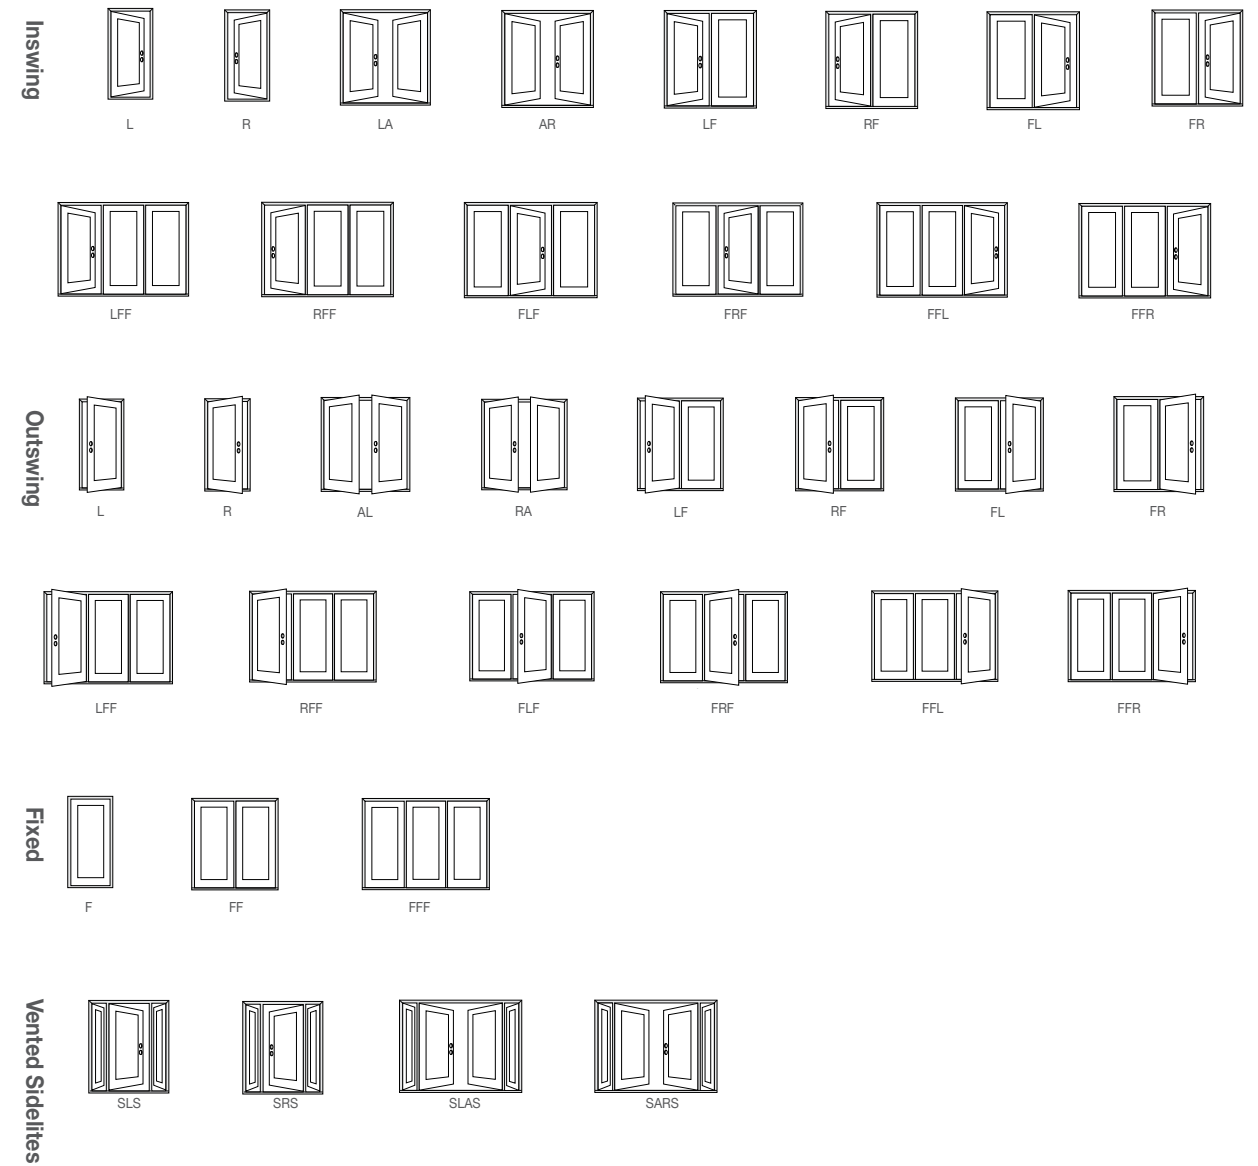

Vinyl Sliding Patio Systems Handing Options

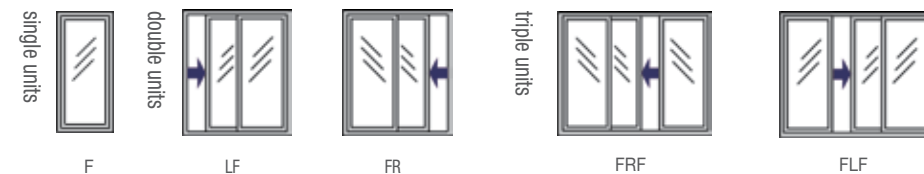

For best performance, double doors to be used in areas with severe weather exposure must be installed using entry alcoves or large soffit overhangs to protect patio unit from exposure.